


Windows, Doors, Conservatories & Orangeries

The imagine Multi-Fold Door



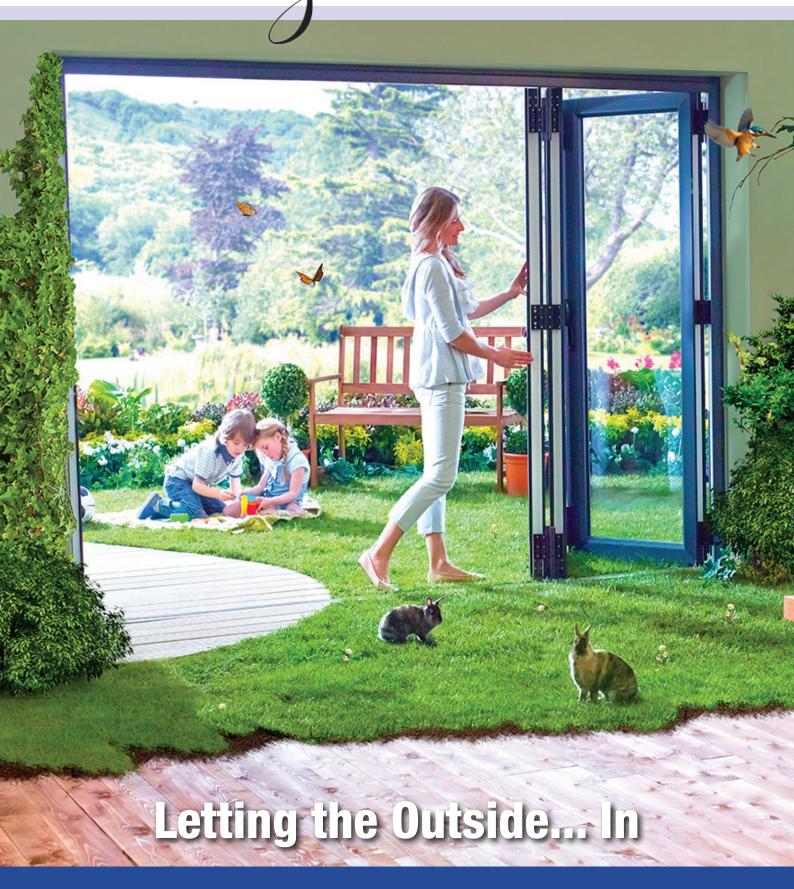

Features and Benefits

- ✓ Clean Contemporary look with slim sight-lines
- ✓ Outstanding thermal performance
- ✓ Available triple glazed
- ✓ Overall door 'U' value 1.35 double glazed
- ✓ Overall door 'U' value 0.99 triple glazed
- ✓ Fully adjustable slimline hinges
- ✓ Hidden track
- ✓ Choice of foil options
- ✓ Maximum sash width 1000mm
- ✓ Maximum door height 2400mm
- ✓ Minimum overall door height 1950mm
- ✓ Suited furniture
- ✓ Cranked lever/lever handle to allow tight stacking
- ✓ Premium quality magnets
- ✓ Available in 16 different opening configurations
- ✓ DDA compliant where required
- ✓ Fully welded or mechanical outer frame
- ✓ Pas 24 and Secure by Design achievable
- ✓ ERA 5 star guarantee
- ✓ Choice of 3 threshold options
- ✓ 20mm Astragal Bar option
- ✓ Midrail option available



Cranked lever/lever handle available in White, Black, Gold and Chrome



in White, Black, Gold and Chrome



Hidden track



Fully adjustable hinges available in White or Black

Colour Options


Smooth White

Available both sides



Rosewood





Standard Foils



Irish Oak

Special Foils

*Supplied on White base substrate

Available both sides or on smooth white



Anthracite Grey*

White Ash Both sides Only

Available on smooth white only

Special Foils



Painswick Grey

The next generation in **PVCU Multi-Fold Doors**

The 'Imagine' door is a new concept in PVCU Multi-Folds combining the rigidity of aluminium and the aesthetics of timber.

Its attention to detail in design, security and thermal performance all combine to make it a truly innovative way to transform any room.

Standard Specification

- Available opening inwards or outwards
- 6 chambered stepped 70mm outer frame
- 5 chambered 80mm chamfered sash
- 28mm Planitherm toughened sealed units with Argon gas and black warm edge spacer
- · Sculptured beads with black gaskets
- Hinges and D handle supplied in black (white available)
- · Magnets when required will match hinge colour
- Fully welded outer frame (mechanical jointed option available)


A firm load bearing lintel is required to ensure a solid fixing to the head.








Designed to meet the security requirements of British standards PAS 24 and Secured by Design

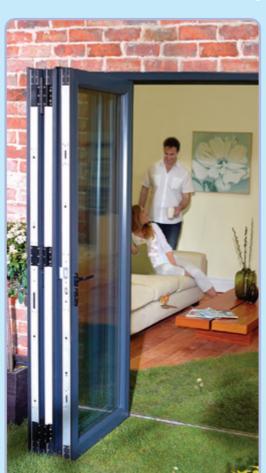

Cranked lever/lever allowing tight stacking doors

Threshold and Trickle Vent Options Head detail showing optional 50mm extender

50mm extender is suitable for trickle vents



Glass to glass sightline of 172mm on all leaves



65mm

Standard

Threshold

Optional ramp for threshold* 30mm low threshold

** If used externally draft proofing and weather performance will be reduced



15mm threshold for internal use only






The 'Imagine' Multi-Fold Door



KEY:

- These doors do not have a single prime door. Two leaves need to be operated together No external handle available
- Sashes are manufactured 60mm wider than adjoining sashes to allow them to operate correctly
- Indicates cranked lever/lever handle with euro cylinder
- Indicates internal intermediate handle

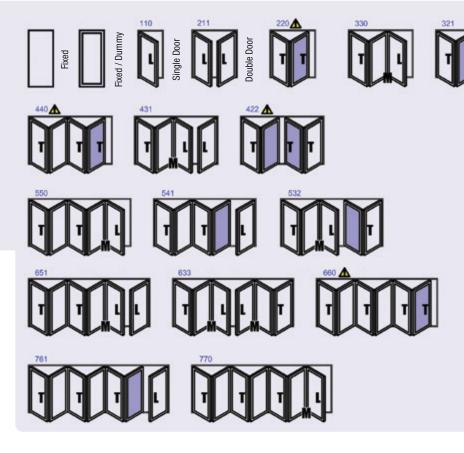

imagine





Why not consider the other collections available from Time (

o Choices brand

www.alternative2timber.com

An Exclusive Collection of Timber Alternative Windows and Doors

www.cwgchoices.com

The Entire Range of Choices Windows, Doors, Conservatories and Orangeries

www.choicesaluminium.co.uk

Aluminium Windows and Doors for Dommestic and Commercial properties